查询SPX2391AS供应商

100mA Low Dropout Voltage Regulator

FEATURES

- 3.3V and 3.5V Versions
- Output Current in Excess of 100 mA
- Input-Output Differential is 0.3 at 100mA
- Mirror-Image Insertion Protection
- Internal Thermal Protection
- Available in TO-92 and SOT-89 Packages
- Improved Version of the Industry Standard LM2931
- Reverse Battery, Internal Short Circuit, 20V Reverse Transient and 60V Load Dump Protection
- Availiable with either 2% or 3% Output Accurancy at 25°C



Bottom View



Top View

Now Available in Lead Free Packaging

APPLICATIONS

- Portable Instrumentation
- Cordless Telephones
- Radio Control Systems

DESCRIPTION

The SPX2931 is a low power, positive voltage regulator. This device is an excellent choice for use in battery-powered applications such as cordless telephones, radio control systems, and portable computers. The SPX2931 features offers very low quiescent currents (0.4 mA), and very low drop output voltage (50 mV at light load and 300 mV at 100 mA). The SPX2931 is offered in a 3-pin TO-92, and SOT-89 package.

TYPICAL APPLICATIONS CIRCUIT

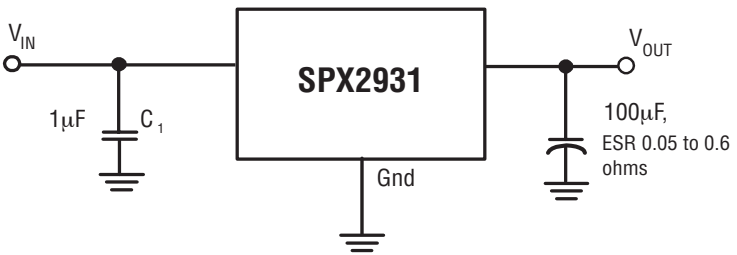

 © Copyright 2004 Sipex Corporation

ABSOLUTE MAXIMUM RATINGS

Power Dissipation (note 3) ..... Internally limited
Lead Temp (soldering, 5 seconds) ..... 260°C
Storage Temperature Range ..... -65°C to +150°C
Input Supply Voltage Range ..... -0.3 to +30V
ESD Rating (note 4) 2kV

RECOMMENDED OPERATING CONSITIONS

Input Voltage Range ..... 3.0 to 26V
Operating Junction Temperature Range ..... -40°C to 125°C
TO-92 Θ_{JA} ..... 160°C/W
SOT-89 Θ_{JA} ..... 110°C/W

ELECTRICAL CHARACTERISTICS

at V_{IN}=6V, T_A = 25°C, I_O = 10 mA, C_{OUT} = 100 µF, unless otherwise specified. (Note 1)

PARAMETER	CONDITIONS	MIN	TYP	MAX	MIN	TYP	MAX	UNITS
3.3V Version								
Output Voltage (Note 2)	4V < V_{IN} <26V, I_O = 100 mA over temp.	3.234 **3.201**	3.300 3.300	3.366 **3.399**	3.201 **3.135**	3.300 3.300	3.399 **3.465**	V
3.5V Version								
Output Voltage (Note 2)	4.5V < V_{IN} < 26V, I_O = 100mA Over Temp.	3.430 **3.395**	3.500 3.500	3.570 **3.605**	3.395 **3.325**	3.500 3.500	3.605 **3.675**	V
All Voltage Options								
Long Term Stability			20			20		mV/1000hr
Line Regulation	9V<V_{IN}<16V, 4.5V<V_{IN}<26V		2.0 4.0	10 30		4.0	30	mV
Load Regulation	5mA<I_O< 150mA		14	50		14	50	mV
Dropout Voltage	I_O =10mA I_O =150mA		0.05 0.3	0.2 0.6		0.05 0.3	0.2 0.6	V
Quiescent Current	I_O =10mA, 4.5V<V_{IN}<26V -40°C<Tj<85°C I_O =150mA, VI_N=14V, T_J =25°C		0.4 15	1.0		0.4 15	1.0	mA
Output Noise Voltage	10Hz-100kHz, C_{OUT} =100µF		500			500		μV_{RMS}
Ripple Rejection	F_O =120Hz		80			80		dB
Maximum Operational Input Voltage		26			26			V
Maximum Line Transient	R_L = 500Ω, 100ms	60	70		50	70		V
Reverse Polarity Input Voltage, DC	V_O> -0.3V, R_L= 500Ω	-15	-30		-15	-30		V
Reverse Polarity Input Voltage, Transient	1% Duty Cycle, τ <100ms R_L=500Ω	-50	-80		-50	-80		V

NOTES:
Note 1: See TYPICAL APLICATIONS notes to ensure constant junction temperature, low duty cycle pulse testing used.
Note 2: All limits are at 25°C or over the full operationg junction temperature range of -40°C to +125°C.
Note 3: The maximum power dissipation is a function of maximum junction temperature, total thermal resistance, and ambient temperature.
Note 4: Human body model, 100pF discharged through 1.5kΩ.

© Copyright 2004 Sipex Corporation

TYPICAL PERFORMANCE CHARACTERISTICS

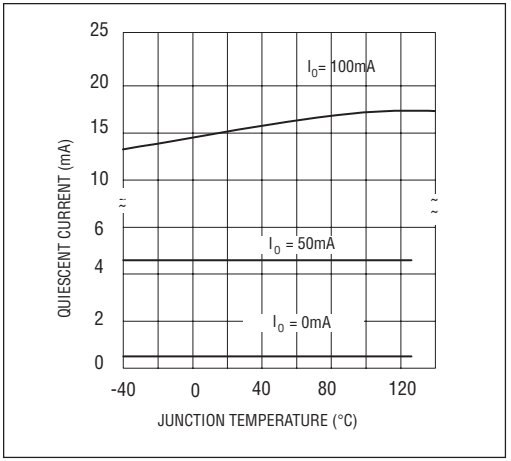

Figure 1. Quiescent Current

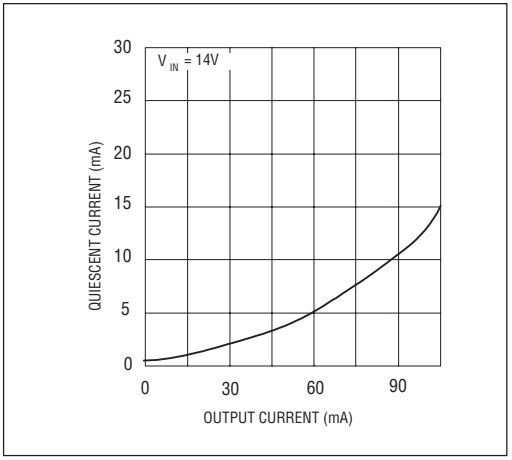

Figure 2. Quiescent Current

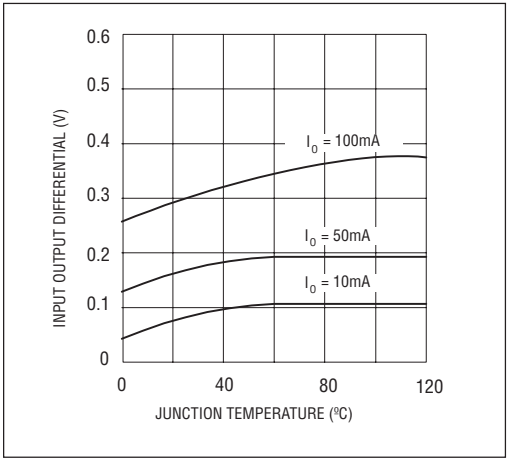

Figure 3. Dropout Voltage

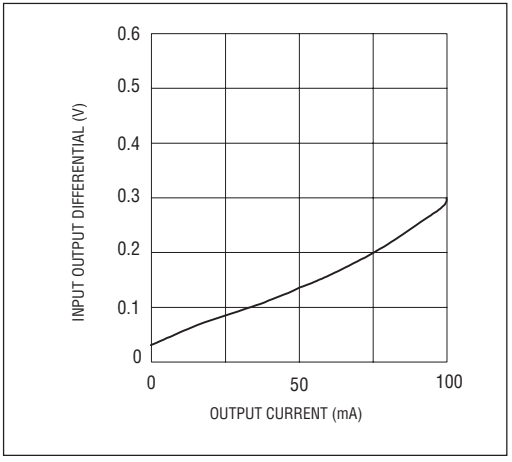

Figure 4. Dropout Voltage

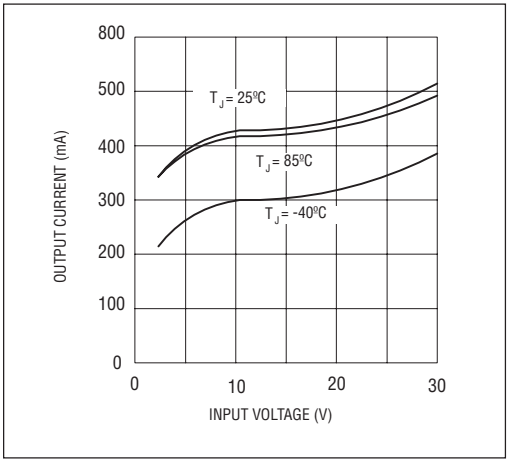

Figure 5. Peak Output Current

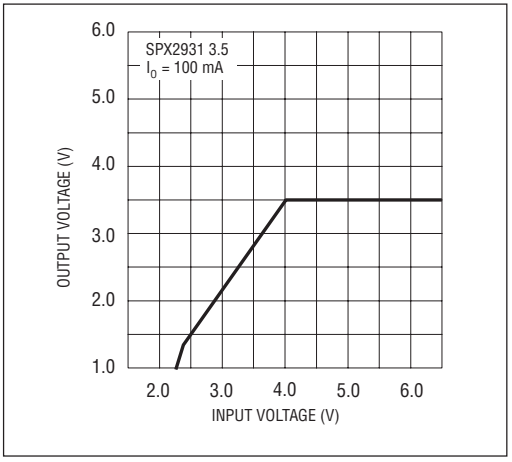

Figure 6. Low Voltage Behavior

 © Copyright 2004 Sipex Corporation

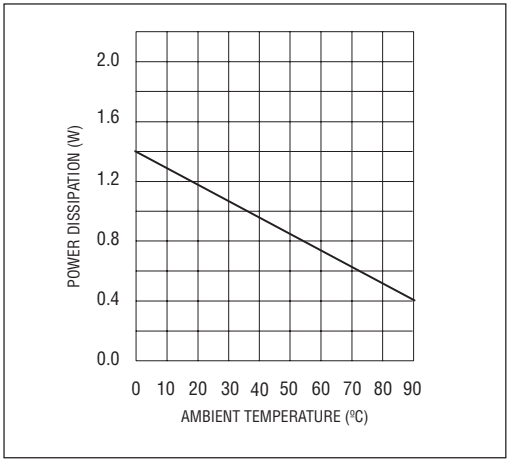

Figure 7. Maximum Power Dissipation (SOT89)

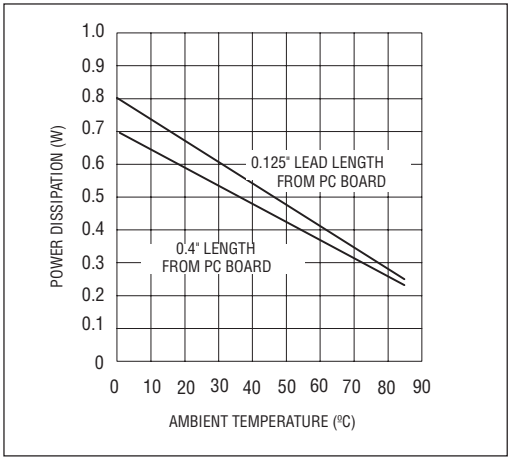

Figure 8. Maximum Power Dissipation (TO-92)

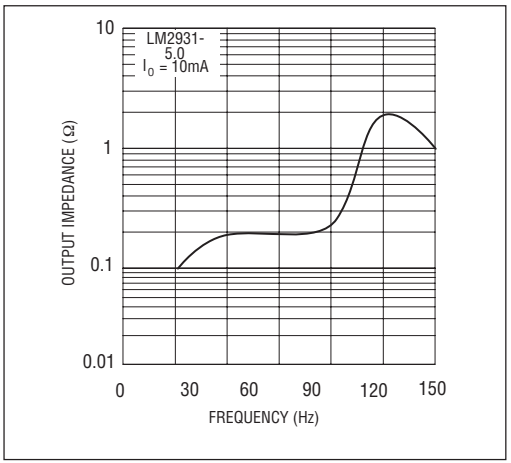

Figure 9. Output Impedance

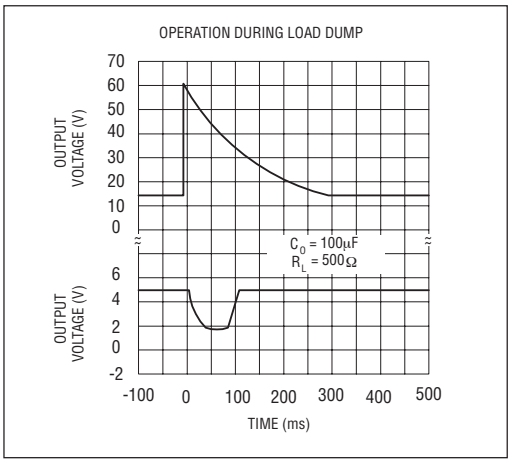

Figure 10. Operation During Load Dump

APPLICATION INFORMATION

The SPX2931 requires an output capacitor for device stability. The value required varies greatly depending upon the application circuit and other factors. The high frequency characteristics of electrolytic capacitors depend greatly on the type and also on the manufacturer. Sometimes bench testing is the only means to determine the proper capacitor type and value. The high quality 100°F aluminum electrolytic covers all general application circuits, this stability can be obtained with a tantalum electrolytic value of 47°F.

Another critical point of electrolytic characteristics is its performance over temperature. The SPX2931 is designed to operate starting at -40°C which may not be true in the case of electrolytic. Higher temperatures generally no problem. The electrolytic. type in aluminum will freeze around -30°C. This could cause an oscillation at output of regulator. At a lower temperature requirement by many applications the capacitor should maintain its performance. So as a result, for an application which regulator junction temperature does not exceed 25°C, the output capacitor can be reduced by the factor of two over the value needed for the entire temperature range.

 © Copyright 2004 Sipex Corporation

In most applications the SPX2931 is operating at few milliamps. In these applications the output capacitance can be further reduced. For example, when the regulator is running at 10mA output current the output capacitance value is half compared to the same regulator that is running at 100 mA. The value decreases with higher output voltages, since the internal loop gain is reduced.

The worst case occurs at the lower temperature and maximum operating currents, the entire circuit and the electrolytic, should be cooled down to the minimum temperature. The minimum of 0.6 volts required at the input of regulator above the output to keep the power dissipation and die heating to its minimum. After the value for the capacitor has been determined for actual use, the value should be doubled.

PACKAGE PINOUTS

TO-92 (N)



Bottom View

SOT-89 (M1)



Top View

 © Copyright 2004 Sipex Corporation

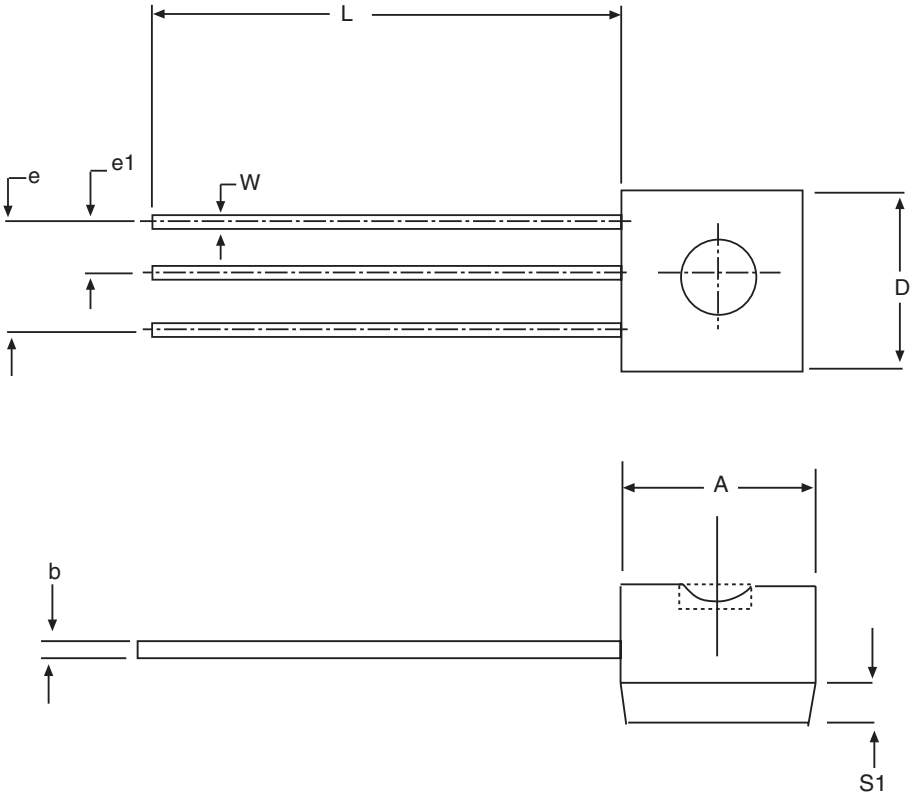

3 PIN TO-92	DIMENSIONS IN INCHES		
SYMBOL	MIN	NOM	MAX
A	.170	-	.195
b	.014	-	.020
E	.130	-	.155
e	.095	-	.105
e1	.045	-	.055
L	.500	-	.610
R	.085	-	.095
S1	.045	-	.060
W	.016	-	0.022
D	.175	-	.195
a	4º	-	6º

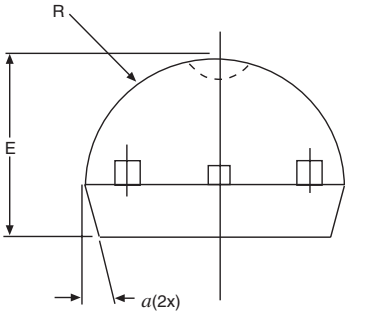

3 PIN TO-92

 © Copyright 2004 Sipex Corporation

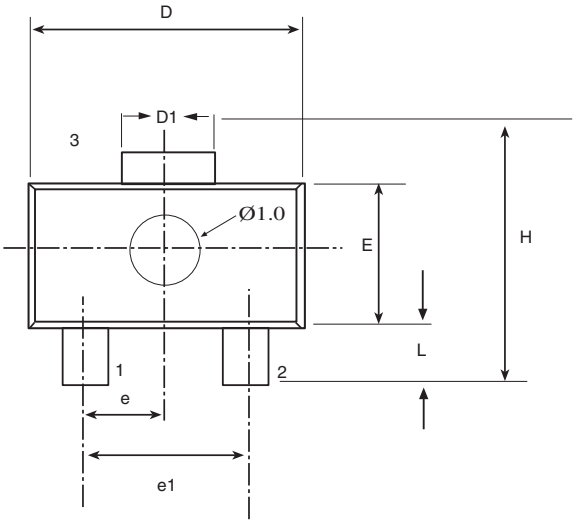

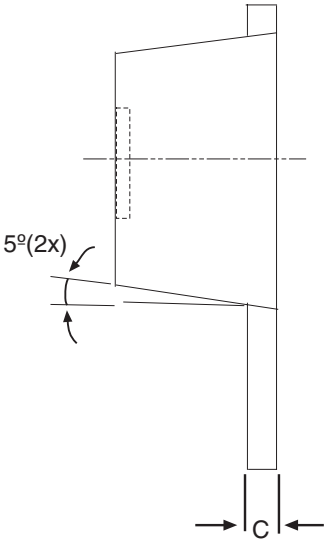

3 PIN SOT-89	Dimensions in (mm)		
	MIN	NOM	MAX
A	1.40	1.50	1.60
b	0.36	0.42	0.48
L	0.80	-	1.20
b1	0.41	0.47	0.53
C	0.38	0.40	0.43
D	4.40	4.50	4.60
D1	1.40	1.60	1.75
H	3.94	-	4.25
E	2.40	2.50	2.60
e	1.45	1.50	1.55
e1	2.90	3.00	3.10

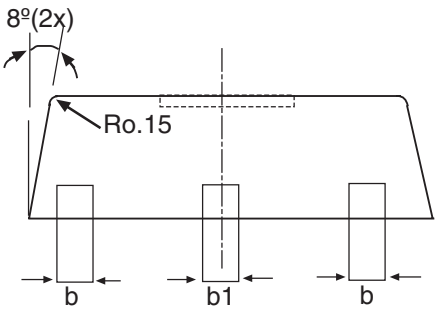

3 PIN SOT-89

 © Copyright 2004 Sipex Corporation

PART NUMBER	ACC.	OUTPUT VOLTAGE	PACKAGE
SPX2931AM1-3.3	2%	3.3V	3 lead SOT-89
SPX2931AM1-3.3/TR	2%	3.3V	3 lead SOT-89
SPX2931AM1-3.5	2%	3.5V	3 lead SOT-89
SPX2931AM1-3.5/TR	2%	3.5V	3 lead SOT-89
SPX2931AN-3.3	2%	3.3V	3 lead TO-92
SPX2931AN-3.3/TR	2%	3.3V	3 lead TO-92
SPX2931AN-3.5	2%	3.5V	3 lead TO-92
SPX2931AN-3.5/TR	2%	3.5V	3 lead TO-92
SPX2931M1-3.3	3%	3.3V	3 Lead SOT-89
SPX2931M1-3.3/TR	3%	3.3V	3 Lead SOT-89
SPX2931M1-3.5	3%	3.5V	3 Lead SOT-89
SPX2931M1-3.5/TR	3%	3.5V	3 Lead SOT-89
SPX2931N-3.3	3%	3.3V	3 Lead TO-92
SPX2931N-3.3/TR	3%	3.3V	3 Lead TO-92
SPX2931N-3.5	3%	3.5V	3 Lead TO-92
SPX2931N-3.5/TR	3%	3.5V	3 Lead TO-92

Available in lead free packaging. To order add "-L" suffix to part number.

Example: SPX2931AN-3.3/TR = standard; SPX2931AN-L-3.3/TR = lead free

/TR = Tape and Reel

Pack quantity is 2,000 for TO-92 and 2,500 for SOT-89.

Sipex Corporation

ANALOG EXCELLENCE

Sipex Corporation

Headquarters and Sales Office
233 South Hillview Drive
Milpitas, CA 95035
TEL: (408) 934-7500
FAX: (408) 935-7600

Sipex Corporation reserves the right to make changes to any products described herein. Sipex does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent rights nor the rights of others.

 © Copyright 2004 Sipex Corporation